




Electrical-- LIGHTING REQUIREMENTS for SINGLE-FAMILY RESIDENCES

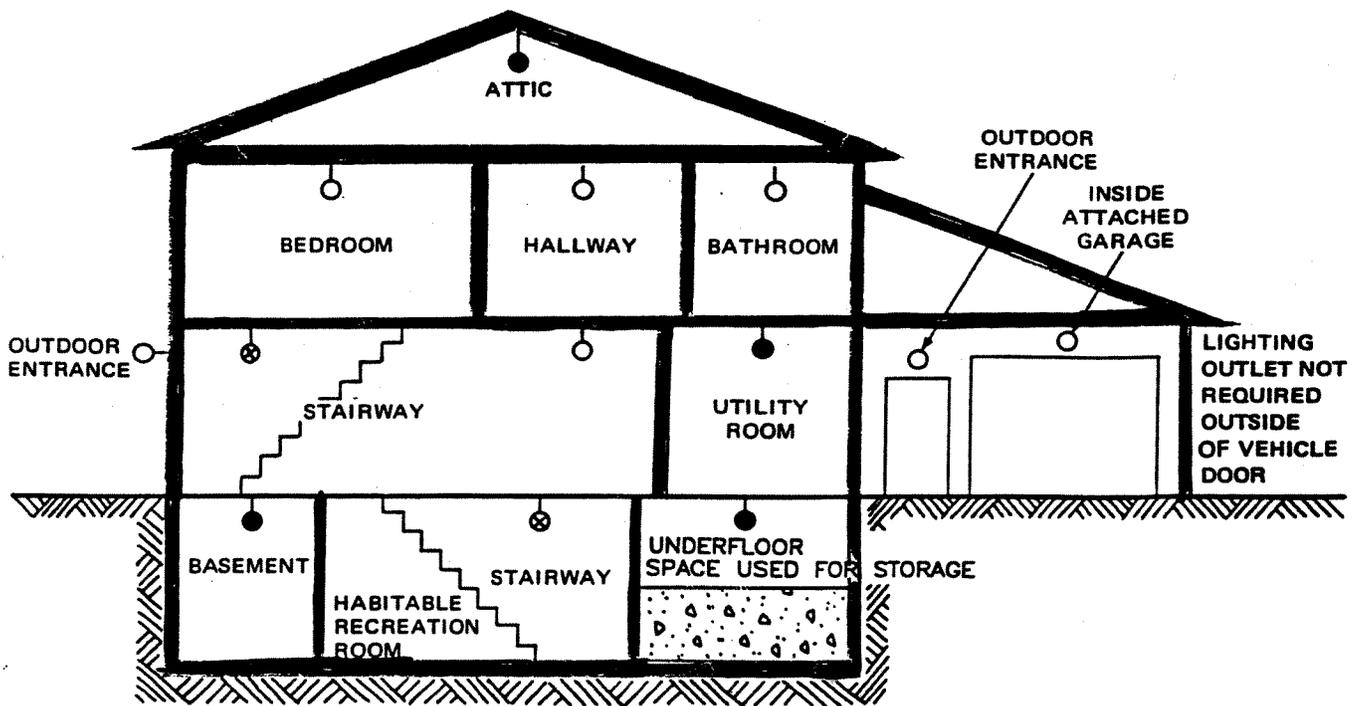

- LIGHTING OUTLET MUST BE WALL-SWITCH-CONTROLLED.
 - LIGHTING OUTLET(S) MUST BE SWITCH-CONTROLLED IF SPACE IS USED FOR STORAGE OR IF SPACE CONTAINS EQUIPMENT THAT WILL REQUIRE SERVICING, SUCH AS AIR-CONDITIONING, FURNACES, AND SO ON. THE LIGHTING OUTLET(S) MUST BE LOCATED NEAR THE EQUIPMENT. THE SWITCH MUST BE LOCATED NEAR ENTRY TO THE SPACE.
 - ⊗ IF STAIRWAY HAS SIX OR MORE STEPS, INSTALL SWITCHES ON BOTH LEVELS.
- EXCEPTIONS:
- SWITCH-CONTROLLED RECEPTACLES MAY BE INSTALLED IN PLACE OF LIGHTING OUTLETS, EXCEPT IN KITCHENS AND BATHROOMS.
 - REMOTE, CENTRAL, OR AUTOMATIC CONTROL OF LIGHTING IS ACCEPTABLE FOR HALLWAYS, STAIRWAYS, AND OUTDOOR ENTRANCES.

Fig. 3-10 Lighting outlets required in a typical dwelling unit. Section 210-70.